


DC Power Supply

(Product Code 25.4)

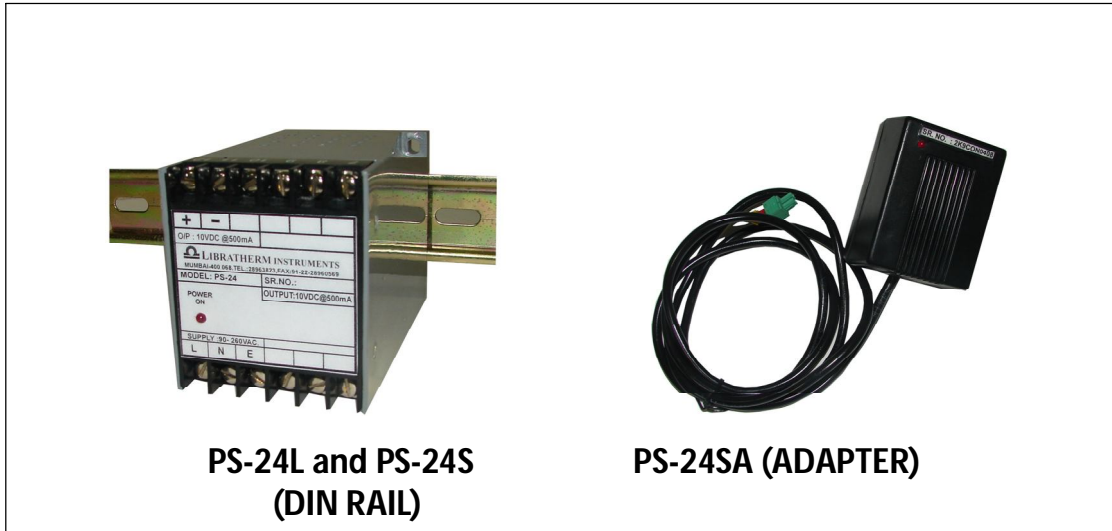

**PS-24L and PS-24S
(DIN RAIL)**

PS-24SA (ADAPTER)

Description:

Libratherm offers DC Power Supply Models PS-24/L (Regulated/Variable Linear power supply) and PS-24/S (fixed SMPS) used for various application in the industry. DC output of these power supplies is adjustable from 5 to 24 VDC. These Models are available in standard DIN Rail size in ABS plastic enclosure.

Application:

- ◆ Loop power supply to external Temperature Transmitters.
- ◆ Loop power supply to external Pressure, Level, Flow and Humidity Transmitters etc.
- ◆ Power supply to Transducers, Sensors, Encoders, Proximity and IR Sensors etc.
- ◆ Power supply to Relay Cards.

Technical Specifications:

Model	PS-24L for Linear and PS-24S for SMPS
DC Output PS-24L	5 to 24 VDC adjustable @ max. 100mA.
DC Output PS-24S	24VDC fixed @ max. 500mA.
Supply	230VAC for PS-24L and 90-240VAC for PS-24S
Mounting	DIN Rail or in the Adapter form.
Size	As per Std.
Enclosure	ABS Plastic